


Installation instructions

The luminaire can be attached directly from the ceiling (left drawing below) or via the lead through (right drawing).



Above a (dinner) table: height of the lamp is 1.50 meters above the floor.
Keep some extra length of cable inside the ceiling cover.



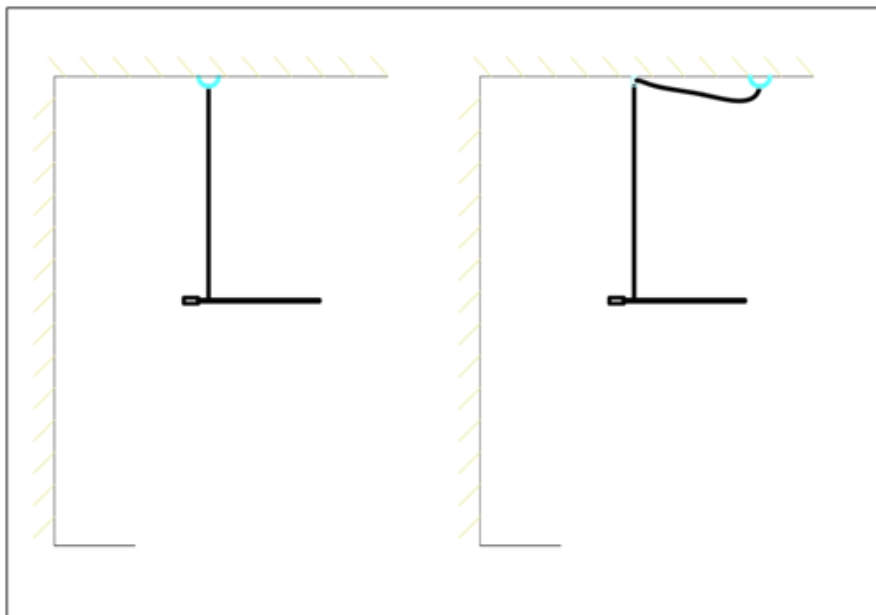


Disconnect mains power before starting !!

The holes in the ceiling plate match with a normal connection box.
Connect the 220 volt current to the wiring. Blue to blue, brown to black (switch wire) or brown (live). Do not use green-yellow (ground).

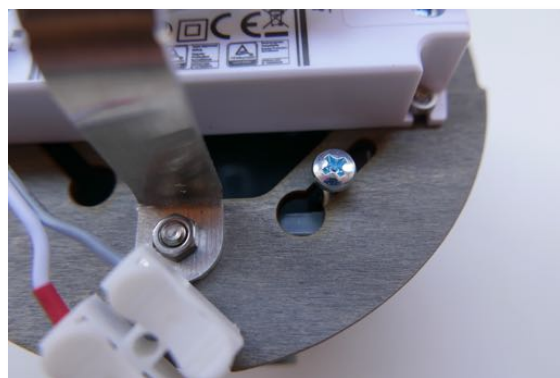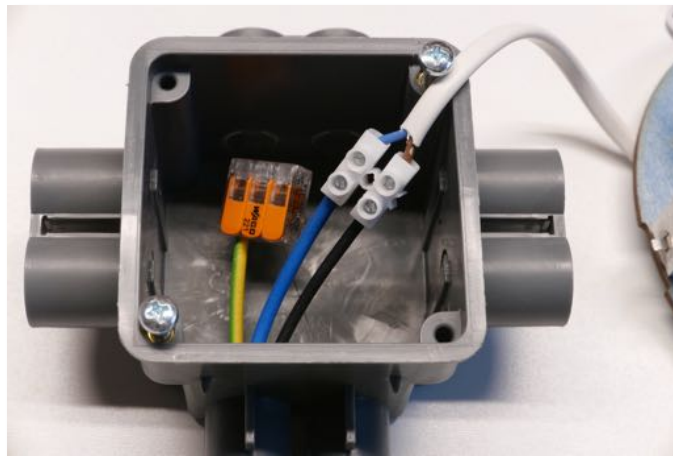

If you use the lead through on the ceiling, do not forget to lead the wire.

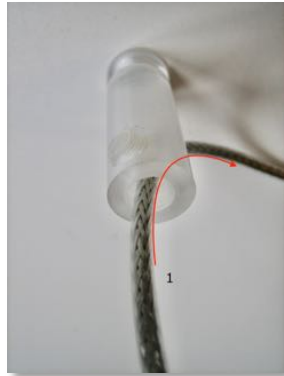

Again: normal height above a table is 1 meter 50 above floor level.
Keep some extra length inside the ceiling cover.

In case you have to shorten the cable: it has a twisted outside mantle.
Cut away the isolation carefully, twist it into a wire (picture to the right).
This is MINUS.

Strip the black inner wire, that is PLUS.



Connect the wires.

Do not forget to lead the cable trough ceiling rose and strain relief first.
Wrongly connected? Nothing happens, it just does not work.....




The height of the luminaire can be adjusted by the strain relief.




Screw the lamp into the weight.




Wire and lamp are connected by the magnet fitting.
'Click' the lamp to the cable (preferably with power off).
Make sure the magnet fits into the 'nest' of the luminaire.
The voltage to power the lamp is 24 volt DC, safe to be touched.

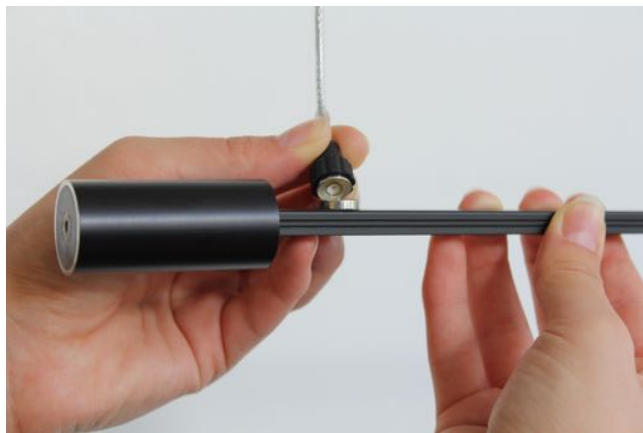

To correct the horizontal balance:
rotate the weight in (red arrow) or out (blue), until it is exactly horizontal.

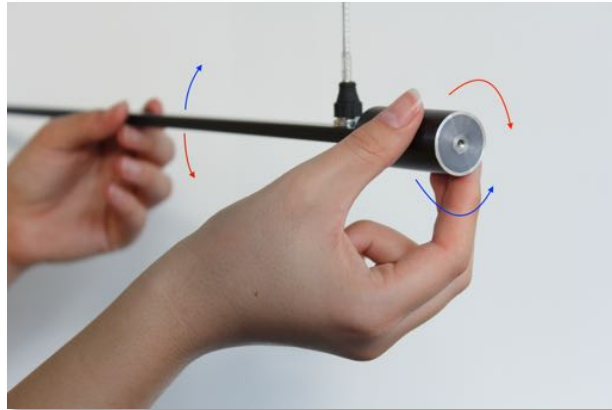

Rotation: turn the lamp by holding the cable-end with one hand, move the lamp with the other hand. You can turn 360 degrees around. In the beginning you will have to correct the rotation several times, until the cable has found its balance.

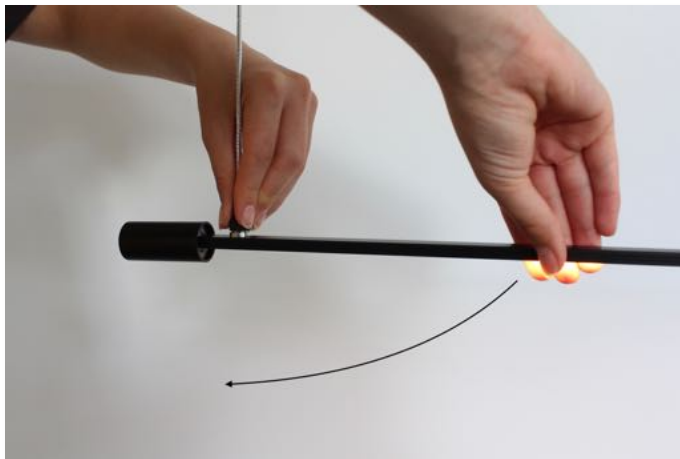

The magnetic fitting is screwed to the cable.
It is tightly fastened (so that it cannot rotate)



Contents

Luminaire and balancing weight.
Cables 3 meters
Ceiling plate with power supply and dimming receiver
Dimming remote and manual.
Cable lead through, strain relief
Ceiling rose

Specifications

2000 lumen 17 Watt
Dimming 11 steps
110 / 220 Volt AC power, LED voltage 24 volt
Total length 1100 mm

LumiEus
licht maken en breken
eus@lumieus.nl 06 2249 1948